




ERDM SOLAR

POR NUESTRA TIERRA

ERDM 580 M10-78*2 BF

Rated Power 580-600W

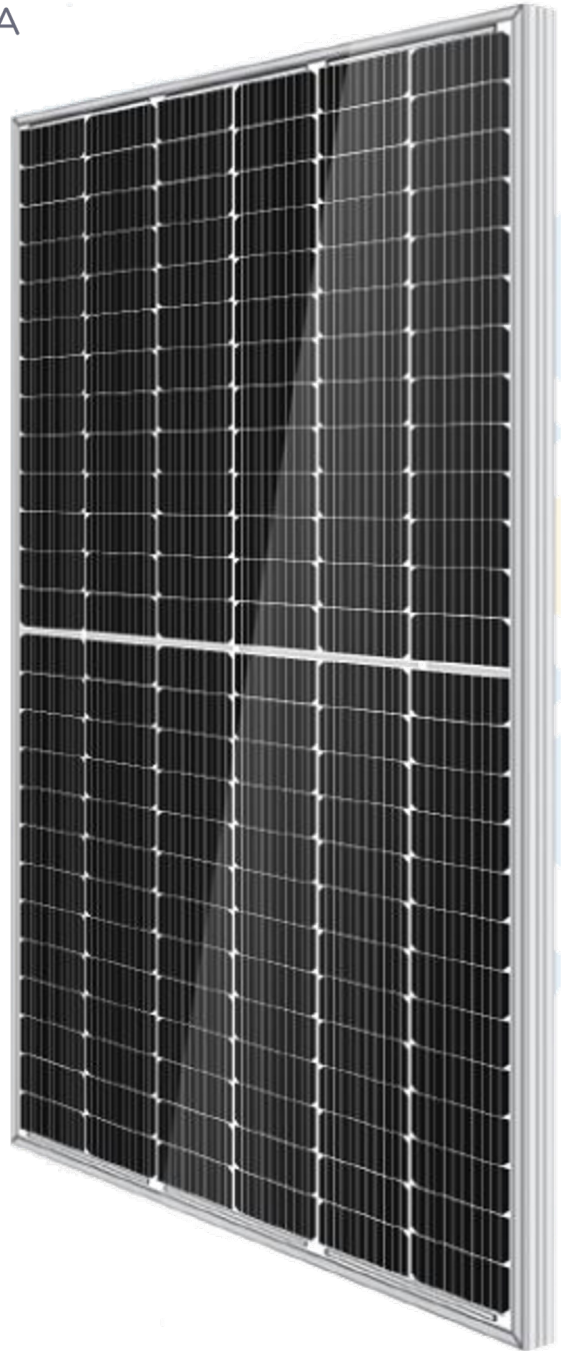

No risk of spontaneous detonation



Bifacial Module is 30% lighter than Dual-Glass Module



Bifacial cells, provide an additional output



Ability to breath, The inner CH₃COOH can be released



MBB Cell

New circuit design, lower internal current, lower internal resistance loss.



Harsh Environmental Adaptability

Strict salt spray and ammonia corrosion test by TUV Nord



Low Light Features

Higher performance under low light environment.



PID Protection

Ensure the attenuation probability caused by PID phenomenon is minimized



Load Capacity

Mechanical load tests including wind load 2400 Pa and snow load 5400 Pa done by TUV Nord.



Higher Output Power

Module adopts 182*182 mm half cells, bifacial module provide an additional 5%~25% output.

1.0% 1st year Degradation


0.55% Annual degradation



Standar Module



ERDM Monocrystalline Module Linear Performance warranty

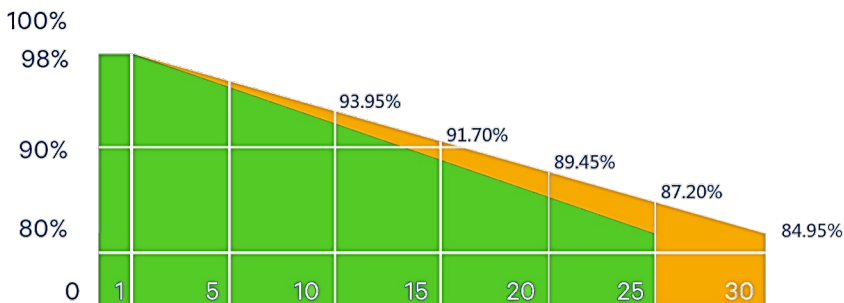


*J-PEC Product




IEC 61215-2: 2016
IEC 61730-2: 2016


The information contained in this data sheet is subject to change without notice and is for informational purposes only.

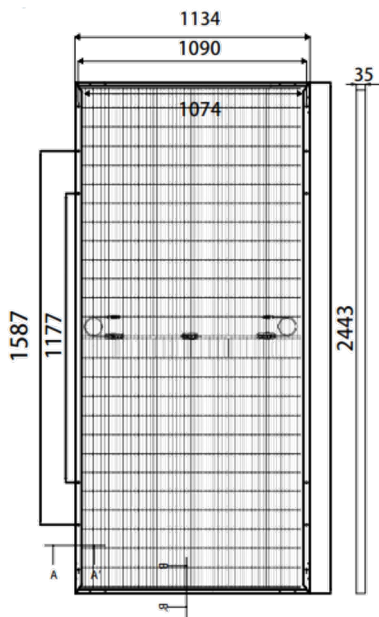

Frame cross section A-A



Frame cross section B-B



SPECIFICATIONS

Type cell	Monocrystalline 182 x 182 mm
Cell Amount	78*2
Junction Box	IP68
Cable	4mm ² , N 300mm / P 300mm
Connector	MC4 Compatible
Frame	Aluminum Alloy 6063 T5
Weight	29 +/- 0.5 Kg
Dimensions	2443 x 1134 x 35 mm (2.77 m ²)

ELECTRICAL PARAMETERS (STC of irradiance of 1000 W/m², spectrum AM 1.5 and cell temperature of 25°C)



Power	580	585	590	595	600
Open Circuit Voltage Voc (V)	53.30	53.50	53.70	53.90	54.10
Maximum Power Voltage Vmp (V)	44.40	44.60	44.80	45.00	45.20
Short Circuit Current Isc (A)	13.81	13.87	13.94	14.01	14.08
Maximum Power Current Imp (A)	13.07	13.12	13.17	13.22	13.27
Module Efficiency (%)	20.94	21.12	21.30	21.48	21.66

ELECTRICAL PARAMETERS (NMOT irradiance of 800 W/m², spectrum AM 1.5, ambient temperature 20°C, wind speed 1 m/s.)

Power	428	431	435	438	442
Open Circuit Voltage Voc (V)	49.80	50.00	50.20	50.40	50.60
Maximum Power Voltage Vmp (V)	41.40	41.60	41.80	42.00	42.20
Short Circuit Current Isc (A)	11.13	11.18	11.23	11.28	11.33
Maximum Power Current Imp (A)	10.32	10.36	10.41	10.45	10.50
Module Efficiency (%)	15.45	15.56	15.70	15.81	15.95

ELECTRICAL PARAMETERS (10% BIFACIAL POWER OUTPUT)

Power	638	644	649	655	660
Open Circuit Voltage Voc (V)	53.30	53.50	53.70	53.90	54.10
Maximum Power Voltage Vmp (V)	44.40	44.60	44.80	45.00	45.20
Short Circuit Current Isc (A)	15.19	15.26	15.33	15.41	15.49
Maximum Power Current Imp (A)	14.37	14.43	14.49	14.54	14.60

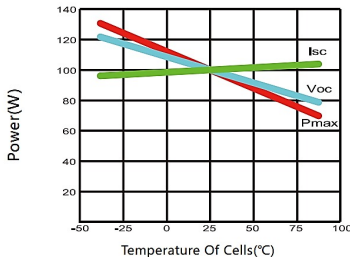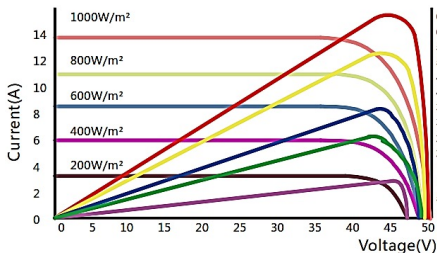

TEMPERATURE CHARACTERISTICS / MAXIMUM RATING

NMOT	41 +/- 3 °C
Temp Coefficient of Pmax	-0.36 %/°C
Temp Coefficient of Voc	-0.28 %/°C
Temp Coefficient of Isc	+0.05 %/°C
Maximum System Voltage	1500V DC (IEC)
Fuse Current	25 A
Operating Temperature	-40 -+85 °C
Wind Load/Snow Load	2400pa / 5400pa

30 YEARS POWER WARRANTY